

GAS WELDING OUTFITS & ACCESSORIES



195FM SERIES - FLOWMETERS

- Designed for accurate regulation of gas flow
- Backpressure compensated design insures accurate readings when line restrictions are present
- Polycarbonate flow tube is square shaped for easy reading
- Body machined from class "A" brass bar stock
- Easy adjustment brass knob for "fine-tune" flow settings
- UL listed




Model No.	Mfg. No.	Gas Service	Max Inlet Preset (PSI)	Inlet Connection	Outlet Connection	Flowmeter Flow Range (SCFH)	Price /Each
331-4185	195FM	Argon, Carbon Dioxide	50	1/4" NPT(M)	5/8"-18 RH(F)	0-60 Ar	

198CD ELECTRICALLY HEATED REGULATORS/FLOWMETERS FOR CARBON DIOXIDE

- Designed for applications requiring extremely high gas flow rates
- Built-in, thermostatically-controlled electric heater keeps the carbon dioxide warm, allowing for continuous duty cycle without freezing
- 110 VAC/190 W heater is standard
- 0-60 SCFH flowmeter is backpressure compensated to ensure accurate reading when line restrictions are present
- Forged brass body and housing cap with sintered bronze inlet filter

Caution: Use this regulator only with non-siphoned standard carbon dioxide cylinders

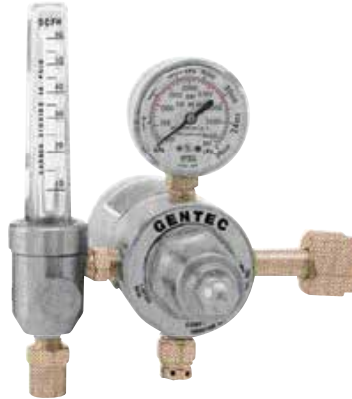

Model No.	Mfg. No.	Gas Service	Max Delivery Pressure (PSI)	Inlet Gauge	Flowmeter (SCFH)	Inlet Connection	Outlet Connection	Price /Each
331-4210	198CD-60	Carbon Dioxide	50 (Preset)	2", 4000 PSI	60	CGA320	5/8"-18 RH(F)	

4 IN 1 CUTTING ATTACHMENT

CIRCLES-STRAIGHT CUTS-BEVELS-REGULAR LINE CUTS

- Converts any standard torch into an accurate convenient multi-use tool
- Cut perfect circles up to 25" in diameter
- Make precision straight edge and end cuts
- Adjustable guide wheels provide a steady base making it easy to follow irregular patterns and odd cuts

Model No. TTV221
Price/Each \$



BRASS PRESSURE GAUGES

- Dual scale
- Lexan™ cover lens
- 1/4" NPT inlet



Model No.	Description	Price /Each
NT616	2" x 100 PSI	
NT617	2" x 200 PSI	
NT618	2" x 30 PSI - Red line	
NT619	2" x 400 PSI	
NT620	2" x 4000 PSI	
NT622	2 1/2" x 200 PSI	
NT623	2 1/2" x 30 PSI - Red line	
NT624	2 1/2" x 400 PSI	
NT625	2 1/2" x 4000 PSI	



STEEL PRESSURE GAUGES

- Dual scale
- Lexan™ cover lens




Model No.	Mfg. No.	Scale Ranges	Entry Type	Price /Each
1 1/2" STEEL CASE, 1/8" NPT INLET				
331-2980	G15-030RL	0-30 PSI - Red Line	Side	
331-2985	G15-100	0-100 PSI	Side	
331-2990	G15-400	0-400 PSI	Side	
331-2995	G15-4000	0-4000 PSI	Side	
331-2445	GR15-4000	0-4000 PSI	Rear	
2" STEEL CASE, 1/4" NPT INLET				
331-2405	G20-050CF	0-50 SCFH	Side	



PROPANE REGULATORS

- High pressure industrial/commercial regulator
- Vapour service with portable torches or construction heaters
- Rated for approximately 2 000 000 BTU
- Includes fittings: 0 - 60 PSIG
- **Hose sold separately**

Model No. TTV219
Price/Each \$

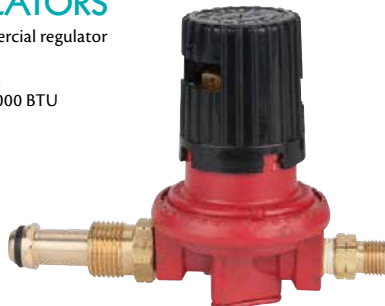

PROPANE HOSES

- For use with propane regulator
- Quality flexible hose
- 350 PSI rating
- CGA approved

Model No.	Mfg. No.	Length'	Price /Each
722-1070	HP-6	6	
722-1010	HP-10	10	
722-1030	HP-20	20	
722-1040	HP-25	25	

